


Oblique View

Typical Configuration
n.t.s

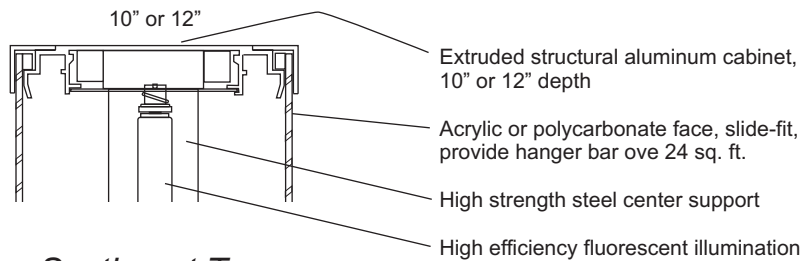

Section at Top

Typical Construction

1-1/2" = 1'-0"

- Extruded structural aluminum cabinet, 10" or 12" depth
- Acrylic or polycarbonate face, slide-fit, provide hanger bar over 24 sq. ft.
- High strength steel center support
- High efficiency fluorescent illumination
- 120 volt primary required, to sign location by others
- Sign to be UL listed and labeled
- Direct burial or baseplate installation with concrete foundation



LISTED
E151394

Reference: Series 250-UL DF illuminated Sign
Standard Specifications, Center Pole Mount

Sept. 2014 HRMc